



EN 60598 LED IP65 IK08  CE


### Product Description

Corrosion resistant aluminium body  
 Acrylic diffuser  
 Stainless steel screws  
 Waterproof and durable silicone gaskets  
 Chromate coating  
 Electrostatic polyester powder coating  
 Anchorage unit with galvanized  
 Mechanical impact resistance IK08  
 Protection grade IP66  
 Electrical Installation Class I


### Lamp & Optics

Up to 100 lm/w  
 3000K - 4000K - 6500K  
 220-240(V) 50-60(Hz)

### Dimensions

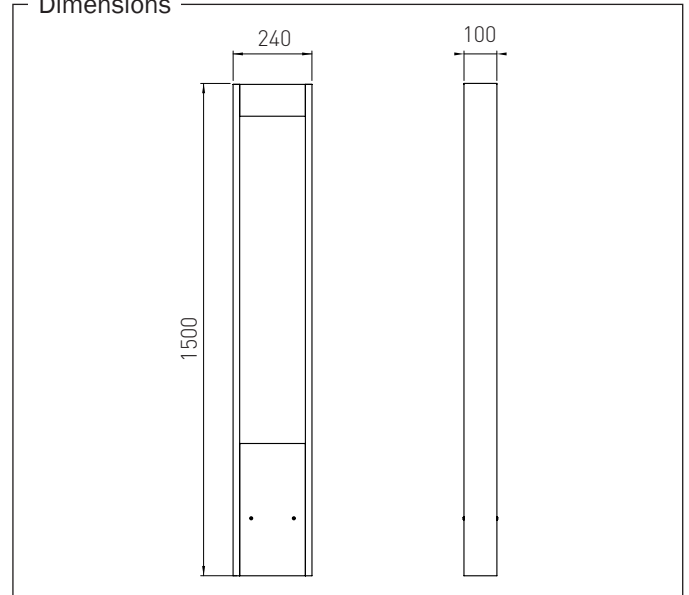


### Light Distribution

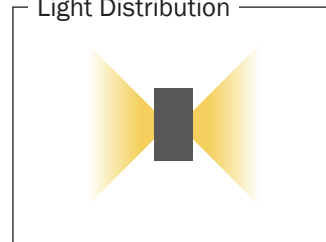

### Options

DALI controllable

### Color Options

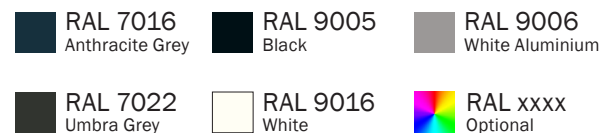

### Application

Light building elements are luminous design elements for public areas. They are particularly suitable for dividing and structuring outdoor spaces. They can be used to guide or lead peoples and vehicles. Their attention-drawing power is considerably greater than that of pole-top luminaires. Light building elements can be used to serve or highlight the architectural structure