



	A	B	Power
LGT.30.106.01	300	150	10 W
LGT.30.106.02	500	150	10 W
LGT.30.106.03	750	150	15 W
LGT.30.106.04	1000	150	15 W
LGT.30.106.05	1500	150	20 W
LGT.30.106.06	2000	150	20 W

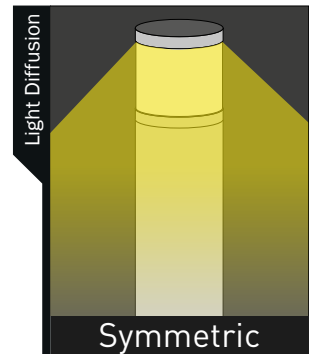

Product Description

- Corrosion resistant aluminum body
- Chromate conversion pretreatment
- Acrylic diffuser
- Steel flange with galvanized
- Electrostatic powder coating
- Stainless steel screws (grade 304)
- Mechanical impact resistance IK03
- Protection Grade IP66
- Electrical installation Class I

Color Options

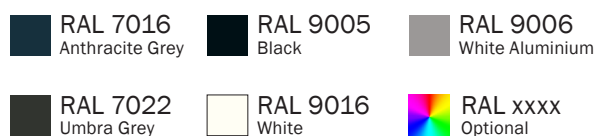

Led & Optics

- Module luminous efficiency 121 lm/W
- Luminaire luminous efficiency 37,60 lm/W
- Cct : 2700K - 3000K - 4000K - 6500K
- Color Rendering Index : >80
- Power Factor : Cos ϕ > 0,9
- Led Life Time - L70 : > 60.000 hours @Ta= 45 °C
- Operating Temperature Range : -5 °C / +45 °C
- Input Voltage : 220-240(V) 50-60(Hz)
- Driver : On/Off

Options

- DALI controllable
- Double powder coating