





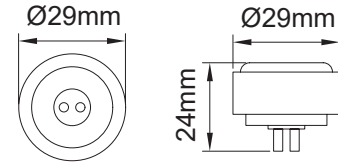


- Die-Cast Aluminium body.
- 316 grade stainless steel frame.
- Installation with plastic outer housing.
- Outer key enables fitting to tilt without opening inside.
- Mains voltage: 220-240V / 50-60Hz.
- Spot, medium and wide beam angles available.
- Max. Weight resistance : 2000KG
- Convenient to be used with COB led.
- Led colour temperatures are optionally 2700K, 3000K, 3500K, 4000K and 5000K.
- Thermal shock resistant safety glass.
- Weatherproof and durable silicone rubber gasket.
- All external screws are stainless steel.
- High colour consistency: <3 SDCM
- Up to 135lm/W efficiency.

Dimensions

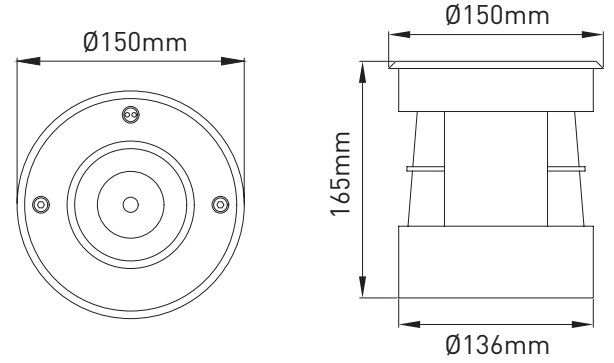

Light Distribution

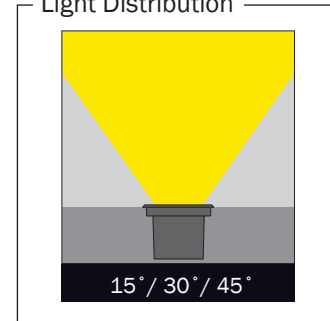

Meteor / [LGT.120.101](#)

Order Code	System Power	Kelvin / Color	Lumen Output	Dali Dimming Opt.	1-10V Dali Dimming Opt
LGT.120.101.01	6W	2700K	762	✓	✓
LGT.120.101.02	6W	3000K	778	✓	✓
LGT.120.101.03	6W	3500K	794	✓	✓
LGT.120.101.04	6W	4000K	810	✓	✓
LGT.120.101.05	6W	5000K	834	✓	✓