




Altair



Altair is an IP65 rated downlight spot range suitable to be used in outdoor recess ceiling areas, under canopies and for indoor areas in which high degree protection needed due to dust and moisture.

Built in driver on single housing. High Efficient micro silver reflector and COB attachment with different beam angles. Front frame is 316 degree stainless steel.


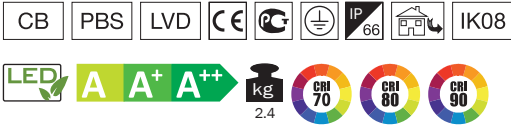


- Corrosion resistant die cast aluminium alloy.
- Front frame 316 degree stainless steel.
- Installation with ceiling clips.
- Mains voltage: 220-240V / 50-60Hz.
- Spot, medium, wide and wide flood beam angles available.
- Convenient to be used with COB led.
- Led colour temperatures are optionally 2700K, 3000K, 3500K, 4000K and 5000K.
- Thermal shock resistant safety glass.
- Weatherproof and durable silicone rubber gasket.
- Ultraviolet stabilized polyester powder coat finish in white, black, dark gray and light gray finish.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- All external screws are stainless steel.
- High colour consistency: <3 SDCM
- Up to 143lm/W efficiency

Dimensions

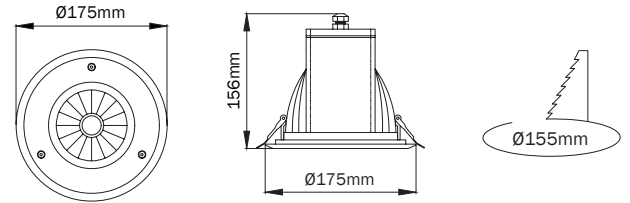

Light Distribution

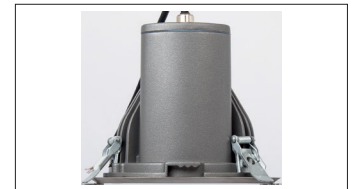

Altair / LGT.140.104

| | | |
|---------------------------|----------------|------|
| Code | LGT.140.104.01 | |
| System Power | 28W | |
| Lumen Output from Fixture | 2700K | 3767 |
| | 3000K | 3844 |
| | 3500K | 3922 |
| | 4000K | 4002 |
| CRI>80 | 4000K | 4002 |
| | 5000K | 4122 |
| Driving Current | 700mA | |
| Dali Dimming Option | ✓ | |
| 1-10V Dimming Option | ✓ | |

