


	A	B	C	Power
LGT.50.300.01	375	400	200	10 W
LGT.50.300.02	375	400	200	15 W
LGT.50.300.03	375	400	200	20 W

* Dimensions are millimeter(mm)

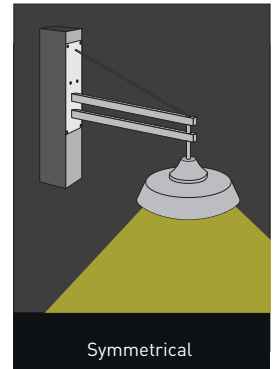

Product Description

- Corrosion resistant aluminium body
- Galvanized steel arm
- Natural wood coating
- Very thin real teak tree
- Chromate conversion pretreatment
- Electrostatic powder coating
- Stainless steel screws (grade 304)
- Mechanical impact resistance IK08
- Protection Grade IP66
- Electrical installation Class I

LED & Optics

- Up to 130 lm/w
- 3000K - 4000K - 6500K
- 220-240(V) 50-60(Hz)

Options

DALI controllable

Color Options

