


	A	B	C	Power
LGT.30.110.01	1000	310	300	10 W
LGT.30.110.02	1000	310	300	15 W
LGT.30.110.03	1000	310	300	15 W
LGT.30.110.04	1000	310	300	20 W
LGT.30.110.05	1000	310	300	20 W
LGT.30.110.06	1000	310	300	20 W



Description

- Extruded aluminum body
- Tempered glass
- Steel flange with galvanized
- Chromate conversion
- Electrostatic powder coating
- Stainless steel screws (grade 304)
- Mechanical impact resistance IK06
- Protection Grade IP66
- Electrical installation Class I

Color Options

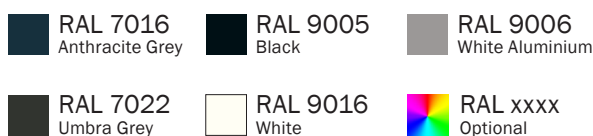

Technical details (Felix module)

- Module luminous efficiency : 121 lm/W
- Luminaire luminous efficiency : 81,8 lm/W (4000k)
- Cct : 2700K - 3000K - 4000K - 6500K
- Color Rendering Index : >80
- Power Factor : Cos ϕ > 0,9
- Led Life Time - L70 : > 72.000 hours @Ta= 45 °C
- Operating Temperature Range : -20 °C / +45 °C
- Input Voltage : 220-240(V) 50-60(Hz)
- Driver : On/Off

Options

- DALI controllable
- Double powder coating