


	A	B	C	Power
LGT.30.100.01	500	150	150	10 W
LGT.30.100.02	750	150	150	15 W
LGT.30.100.03	1000	150	150	15 W
LGT.30.100.04	1500	150	150	20 W
LGT.30.100.05	2000	150	150	20 W
LGT.30.100.06	2500	150	150	20 W

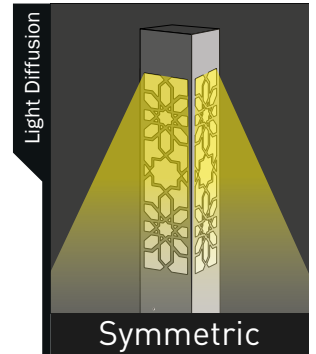

### Product Description

Corrosion resistant aluminum body  
 Chromate conversion pretreatment  
 Electrostatic powder coating  
 Stainless steel screws (grade 304)  
 Mechanical impact resistance IK08  
 Protection Grade IP66  
 Electrical installation Class I

### Options

DALI controllable

### Lamp & Optics

Lumen : Up to 110 lm/w  
 Kelvin : 3000K - 4000K - 6500K  
 Input : 220-240(V) 50-60(Hz)  
 Driver : On/Off

### Color Options

